


# INDUSTRIAL CHAIN HOIST



## Features

- All-steel construction
- Long lasting powder coat finish
- Minimal load lifting effort
- Weston-Style brake system with twin pawl design
- Zinc plated load chain & hand chain
- Fully-enclosed gearing
- Load sheave bearings
- Forged alloy steel hooks
- Thrust bearing on lower hook
- Heavy-duty latches
- Individual test certificates & serial numbers

## Standards - CE, ASME/ANSI B30.16 and AS1418.2

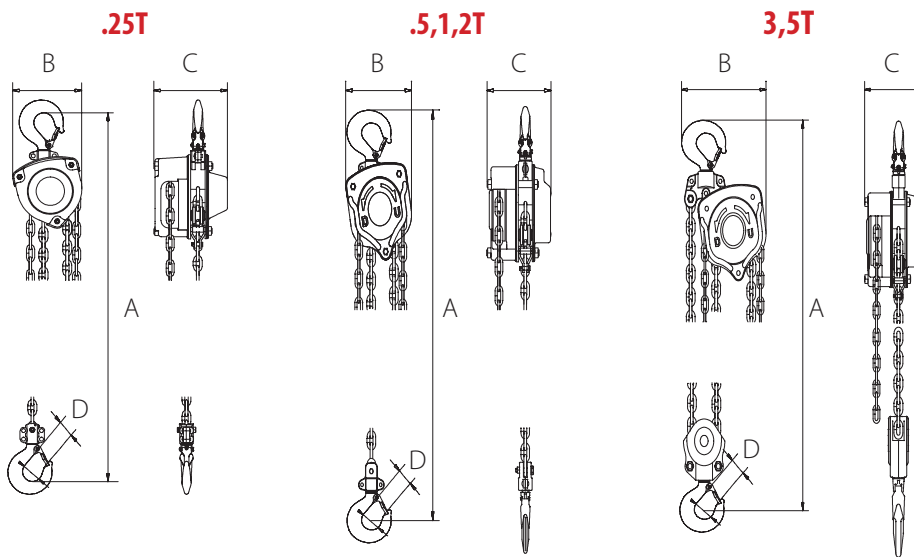

	OZIND025-XXCH	OZIND005-XXCH	OZIND010-XXCH	OZIND020-XXCH	OZIND030-XXCH	OZIND050-XXCH
Capacity (tons)	0.25	0.5	1	2	3	5
Effort to Lift S.W.L. (lb.)	55	55	66	88	88	88
Falls of Chain	1	1	1	1	2	2
Load Chain Diameter (mm)	4x12	5x15	6x18	8x24	8x24	10x30
Product Dimensions (in)	A	10.2	12.8	14.6	17.5	21.7
	B	4.18	5.35	5.75	7.32	8.2
	C	4.02	5.2	5.98	6.14	6.1
Hook-opening, Upper & Lower	D	1.3	1.38	1.73	2	2.28
Net Weight (lb.)	4	10	16	19	30	56.2

**Standard Lift: 10, 15, 20, 30, 40 and 50 ft.**

**We also do custom rigging**

Dimensions and illustrations are for reference only and subject to change without notice.  
XX in hoist model number indicates length of lift by foot.



Excludes  
¼ Ton Model



OZIND020-10CH



**WARNING**  
CANCER AND REPRODUCTIVE HARM  
Some products may contain chemicals known  
to the state of California to cause cancer,  
or birth defect or reproductive harm.  
[www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

