

Features


- Fall protection 310 lb.
- Robust all-steel fully-welded construction
- Super-quick adjustment to most I-Beams (see measurements below)
- ROHS compliant zinc plated finish
- Permanent engraved load rating
- Secondary rod lock nut
- Made in USA
- Individual test certificate & serial number

Standards:

This product meets or exceeds
OSHA 1926 Subpart M
OSHA 1910.140
ASME Z359.1
ASME A10.32-2012
standards for fall protection.



OZ1BCA-MR

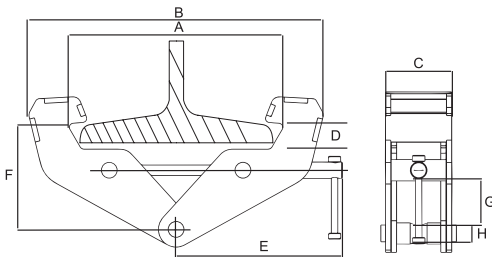


	OZ1BCA-MR	OZ2BCA-MR	OZ3BCA-MR	OZ5BCA-MR	OZ10BCA-MR
Capacity (tons)	1	2	3	5	10
Fall Protection (lb.)	310	310	310	310	310
Dimensional Information (in)	A	3 – 8	3 – 8	3.5 – 13	3.5 – 13
	B	14.75	14.75	20.5	22
	C	2.51	2.91	3.94	4.72
	D	0.9	0.9	1.5	1.6
	E	9.5	9.5	11	11.5
	F	4.75 – 5.75	4.75 – 5.75	7.5 – 9	5.5 – 9.375
	G	1.75	1.75	2.5	4
	H	.75	.875	.975	1.625
Net Weight (lb.)	9	11	22	26	39

PUSH BEAM TROLLEY USA



Features

- Fall protection 310 lb.
- Fast and easy width adjustments
- Built-in width adjustment indicator
- Universal wheel tread fits most I, S, and W-Beams
- Premium double-sealed ball bearings
- ROHS compliant zinc plated finish
- Anti-drop plates
- Glow in the dark decals
- Ships fully assembled
- Made in USA
- Individual test certificate & serial number

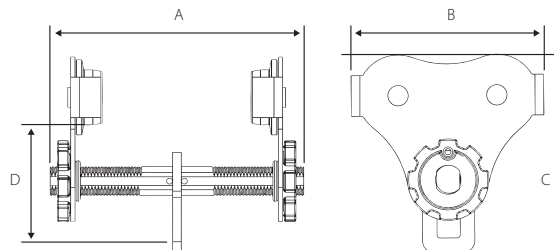

OZ1PBTA-MR
[PATENTED]

Standards:

This product meets or exceeds
OSHA 1926 Subpart M
OSHA 1910
ASME Z359.1-2007
ASME A10.32-2012
standards for fall protection.


Dimensions and illustrations are for reference only and subject to change without notice.

See wheel & bail dimensions page 18

	OZ05PBTA-MR	OZ05PBTA-MR-12	OZ05PBTA-MR-16	OZ1PBTA-MR	OZ1PBTA-MR-12	OZ1PBTA-MR-16
Capacity (tons)	.5	.5	.5	1	1	1
Adjustable flange width (in)	2.50-8.00	2.50-12.00	5.00-16.00	2.25-8.00	2.25-12.00	5.00-16.00
Max Flange Thickness (in)	1.25	1.25	1.25	1.25	1.25	1.25
Product dimensions	A	12.52	16.52	20.52	12.73	16.73
	B	8.28	8.28	8.28	10.13	10.13
	C	9.00	9.00	9.00	9.75	9.75
	D	5.44	5.44	5.44	5.38	5.38
Minimum radius curve (ft)	2.75	2.75	2.75	3.35	3.35	3.35
Net weight (lb.)	16.55	17.74	18.95	25.72	26.88	28.09



PUSH BEAM TROLLEY WHEELS & BAIL DIMENSIONS

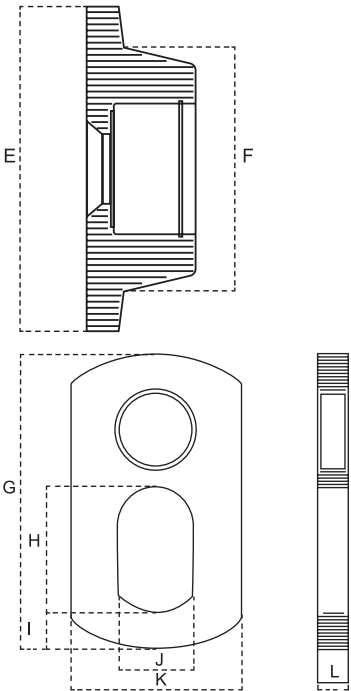

USA

	OZ05PBTA	OZ1PBTA	OZ2PBTA	OZ3PBTA
E (in)	3.25	4.00	4.5	5.75
F (in)	2.38	3.00	3.25	4.38
G (in)	4.38	5.00	6.25	6.88
H (in)	1.50	1.88	2.25	2.5
I (in)	0.63	0.63	0.88	1.0
J (in)	1.00	1.25	1.38	1.5
K (in)	2.25	2.50	3.13	3.5
L (in)	0.38	0.50	0.50	0.63

Import

	OZ025PBT	OZ05PBT	OZ1PBT	OZ2PBT	OZ3PBT	OZ5PBT	OZ10PBT
E (in)	2.56	2.83	3.50	4.53	5.51	6.06	6.91
F (in)	1.77	2.05	2.48	3.35	4.13	4.60	5.24
G (in)	3.27	4.06	4.21	5.43	6.50	7.87	7.68
H (in)	1.18	1.52	1.52	2.24	2.68	3.15	4.49
I (in)	0.59	0.75	0.75	0.83	1.02	1.44	1.91
J (in)	0.94	1.26	1.26	1.34	1.65	1.89	3.35
K (in)	1.65	2.24	2.24	3.15	3.74	4.33	11.22
L (in)	0.24	0.31	0.39	0.47	0.16	0.71	0.79



Dimensions and illustrations are for reference only and subject to change without notice.

