

LEVER HOIST



Features

Standard Overload Protection – Overload Protection prevents the operator from exceeding the limitations of the hoist and is set at a minimum of 40% over the rated load.

Free Wheel Feature – When not under load, the operator can disengage the gearing by positioning the selection switch to the center position. This allows for a quick adjustment of chain for faster operation.

Lifting or Pulling – Can be used for lifting or pulling which makes it a more versatile tool.

Minimal Load Lifting Effort – Double reduction gearing provides easy operation with minimal lifting effort.

360-Degree Handle Rotation – Allows the operator to work in confined spaces.

All-Steel Construction – Featuring a long lasting powder coat finish, the all-steel construction ensures durable protection while providing a long and dependable service life in harsh environments.

Weston-Style Brake System – An enclosed and protected Weston-Style load brake stays clean and dry during the entire load operation. Also equipped with a unique twin pawl design for additional reliability.

Enclosed Gearing – Gears are protected from contamination and debris.

Fully-Enclosed Lift Wheel – Maintains smooth operation while distributing the load over more links of chain. It also helps keep debris from contaminating the lift wheel and self-cleans the chain as it enters the wheel.

Sealed Roller Bearing – This feature provides smooth, controlled operation of the gears and shafts. This ensures maintenance-free lubrication.

Steel Handle with Rubber Grip – Provides a non-slip, sure-grip surface.

Forged Hooks – Forged alloy steel hooks swivel 360° for easier attachment and positioning.

Cast steel safety latches – Heavy-duty, cast-steel safety latch has a bolt-and-lock nut connection. This feature simplifies changing latches in the field.

Zinc-Plated Chain – Provides a durable non-oily finish.

Stainless Steel Riveted ID Tags – Made from stainless steel the ID tag is corrosion resistant.

Maintenance – Hoists can be quickly disassembled for fast and easy maintenance. See the videos and maintenance breakdown animations at OZLiftingProducts.com.

Standard Lift Lengths – 5,10,15, and 20 ft. Custom lengths available upon request.

Safety Hooks & Shipyard Hooks – Available for 1.5 and 3 Ton Lever Hoists.

Individual test certificates & serial numbers.

Standards – CE, ASME/ANSI B30.21, AS1418.2




OVERLOAD
PROTECTED

OZ075-10LHOP

FREE
SPARE SET
OF LATCHES





.75, 1.5, 3T

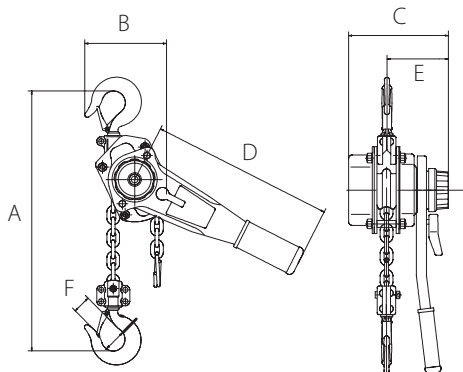



OZ600-15LHOP



6T

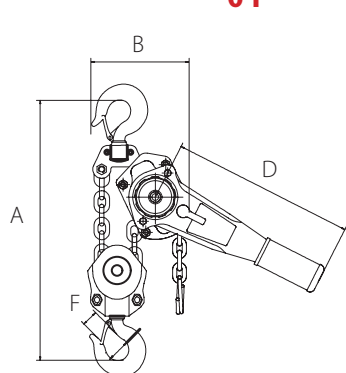

9T

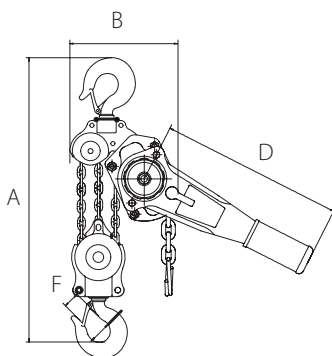

		OZ075-XXLHOP	OZ150-XXLHOP	OZ300-XXLHOP	OZ600-XXLHOP	OZ900-XXLHOP
Capacity (tons)		0.75	1.5	3	6	9
Headroom (in)		12.79	14.96	18.90	24.41	27.56
Effort on lever to lift full load (lbs)		30.86	48.50	70.55	74.96	79.37
Falls of Chain		1	1	1	2	3
Diameter of Load Chain (mm)		6x18	8x24	10x30	10x30	10x30
Length of Lever Handle (in)		11.02	16.14	16.14	16.14	16.14
Dimensional Information (in)	A	12.79	14.96	18.89	24.40	27.55
	B	5.35	6.29	7.08	9.25	12.44
	C	5.82	6.77	7.87	7.87	7.87
	D	12.2	16.14	16.14	16.14	16.14
	E	3.54	3.85	4.52	4.52	4.52
Hook-opening, Upper & Lower (in)	F	1.18	1.26	1.50	1.89	2.13
Net Weight: of Head Only (lbs)		13	22	33	51	81

Standard Lift Lengths: 5, 10, 15, and 20 ft. We also do custom rigging

Dimensions & illustrations are for reference only and subject to change without notice.

XX in hoist model number indicates length of lift by foot.

