

OZ5BCA

Standards - ASME/ANSI B30.16, BTH-1 Design Category B Service Class 0




BEAM CLAMP USA



Features

- Robust all-steel fully-welded construction
- Super-quick adjustment to fit most I-Beams (see measurements below)
- ROHS compliant zinc plated finish
- Permanent engraved load rating
- Individual test certificate and serial number
- Made in USA

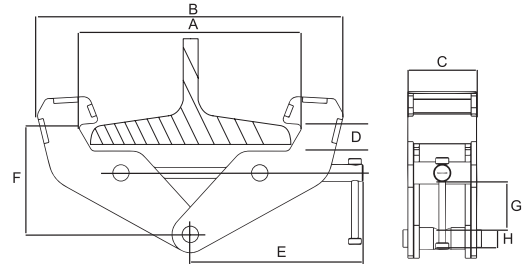

	OZ1BCA	OZ2BCA	OZ3BCA	OZ5BCA	OZ10BCA
Capacity (tons)	1	2	3	5	10
A	3 – 9	3 – 9	3.5 – 13	3.5 – 13	3.5 – 13
B	14.75	14.75	20.5	20.5	22
C	2.51	2.91	3.94	4.41	4.72
D	0.9	0.9	1.5	1.5	1.5
E	9.5	9.5	11	11	11.5
F	4.75 – 5.75	4.75 – 5.75	7.5 – 9	7.5 – 9	5.5 – 9.375
G	1.75	1.75	2.5	2.5	4
H	.75	.875	.975	1.125	1.625
Net Weight (lbs)	9	11	22	26	39

Dimensions and illustrations are for reference only and subject to change without notice.



OZ1PBTA [PATENTED]



Standards - ASME/ANSI B30.17




PUSH BEAM TROLLEY USA



Features

- Fastest adjusting trolley requiring no tools to install
- Lightweight robust construction
- ROHS compliant zinc plated finish
- Glow in the dark decals
- Universal wheel tread fits most I, S, and W-Beams
- Precision ball bearing trolley wheels
- Side plates protect trolley wheels
- Anti-drop plate
- Individual test certificate and serial number
- Made in USA

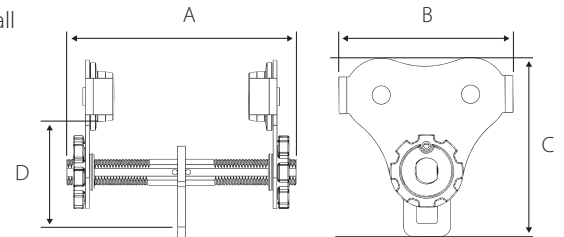

	OZ05PBTA	OZ05PBTA-12	OZ05PBTA-16	OZ1PBTA	OZ1PBTA-12	OZ1PBTA-16	OZ2PBTA	OZ3PBTA
Capacity (tons)	5	5	5	1	1	1	2	3
Adjustable flange width (in)	2.52-8.00	2.52-12.00	2.52-16.00	2.75-8.00	2.75-12.00	2.75-16.00	3.75-8.00	3.75-8.00
Max Flange Thickness (in)	1.12	1.12	1.12	1	1	1	1.5	1.75
Product dimensions								
A	12.25	15.5	19.5	11	15.5	19.5	14	14
B	8.3	8.3	8.3	10.2	10.2	10.2	12	15.4
C	8.5	8.5	8.5	9.8	9.8	9.8	11.9	14
D	5	5	5	5.5	5.5	5.5	8.5	9.87
Minimum radius curve (ft)	2.75	2.75	2.75	3.35	3.35	3.35	4.5	5
Net weight (lbs)	16	19	20	26	30	31	45	80

See wheel and bail dimensions on page 18

Dimensions and illustrations are for reference only and subject to change without notice.

