
XR SERIES® DAVIT CRANE

Individually tested and certified at 125% W.L

OZXR500DAV, OZXR1000DAV



Options for faster lowering and raising



Boon

26

46

Mast

26

41

Net

57

95

500 lbs. and 1,000 lbs. Capacity

XR 500

Features

- Maximum 62-inch reach and 87-inch hook height (both models)
- Maintains maximum weight capacity in all positions
- 360 degree rotation
- 4 different boom height adjustments
- Manual Din rated CE winch with brake. Includes power drill drive adapter

MADE IN USA

DZH

- Durable steel construction with powder coat finish
- Manual Din rated CE winch with brake (Includes power drill adaptor)
- AC & DC winch options

OZXR500DAV Load Ratings (lbs.)

Based on 3/16" wire rope

Weight

OZXR500DAV (lbs)

OZXR1000DAV (lbs)

Weight (excluding winch)

	1st. Layer	Mid. Drum	Full Drum
All positions	500	500	500


OZXR500DAV-ACW shown with optional OZPED3 Pedestal base and OZSR.19-50 synthetic rope assembly and OZHB10 headache ball Bases, cable assemblies and headache ball sold separately

WIRE/SYNTHETIC ROPE ASSEMBLIES


(sold separately) Custom length available.

Manual winch: 3/16" - 80 ft max. lift length AC/DC Electric Winch: 3/16" - 90 ft max. lift length See wire & synthetic rope assembly options page 38

OZXR500DAV DIMENSIONS





w/Socket Base [1740] [1740] [143] [143] [143] [143] [143] [143] [143] [143] [153] 58.79 76.89 [1220] 48.03 41.66



OZXR500DAV BASES (sold separately) Comes with mounting template.


OZPED3






Dimensions and illustrations are for reference only and subject to change without notice.









sales@ozliftingproducts.com






OZXR1000DAV Load Ratings (lbs.)


Based on 1/4" wire or 3/16" Ultrex synthetic rope


	1st. Layer	Mid. Drum	Full Drum
Position 1 (0°)	550	550	550
Position 2 (+22.5°)	650	650	550
Position 3 (+45°)	1000	875	550

OZXR1000DAV DIMENSIONS

Ħŧ







OZXR1000DAV BASES (sold separately) Comes with mounting template.

XR 1000

OZXR1000DAV shown with optional

OZGAL.25-50B galvanized wire rope assembly

Bases, cable assemblies and headache ball sold separately

WIRE/SYNTHETIC ROPE ASSEMBLIES


See wire & synthetic rope assembly options page 38

(sold separately) Custom length available.

Manual winch: 1/4" - 55ft max. lift length AC/DC Electric Winch: 1/4" - 45ft max. lift length

OZPED1-TP Pedestal base and

and OZHB10 headache ball



Dimensions and illustrations are for reference only and subject to change without notice.





sales@ozliftingproducts.com





For all OZ Lifting Products davit cranes up to 1200 lb. capacity

Features

- Industrial strength steel construction with a durable powder-coat finish
- Patented floor-anchoring system allows the davit to rotate while under load (when base is not anchored the davit must remain in a forward position when lifting)
- Features two fixed casters and two swivel casters with locking brakes to make moving the base and davit crane easy
- Forklift pockets (for transporting only)
- Made in USA

Davit crane sold separately

Patent Pending Floor-Anchoring System



OZWB OZWB1 OZWB1-TP OZWB2 OZWB2-TP OZWB3

Wheel Base for all OZ davit cranes up to 1200 lb. capacity (Pedestal Base not included) Wheel Base with Pedestal Base for use with OZ1200DAV


Wheel Base with Pedestal Base for use with OZ1000DAV, OZCF1200DAV

Wheel Base with Pedestal Base for use with OZXR500DAV, OZ500DAV, OZA500DAV Wheel Base with Pedestal Base for use with OZTP1000DAV, OZXR1000DAV, OZA1000DAV Wheel Base with Pedestal Base for use with OZTP500DAV

OZWB3 shown with OZXR500 OZGAL.19-80B galvanized cable assembly OZHB10 10lbs. headache ball Davit crane, headache ball, and cable assemblies sold separately. Locking collar included with applicable wheel base kits.


OZWB DAVIT CRANE REACH DIAMETER






OZWB DIMENSIONS

Сомр




ADJUSTABLE LEG EXTENSIONS



Dimensions and illustrations are for reference only and subject to change without notice.

FLOOR-ANCHORING SYSTEM



WARNING CALCER AND REPRODUCTIVE HARM Some products mys contain chemicals known to be state of Calfornia to cause cancer, or bith delta or reproducts to tamin: www.P65Warning.ca.gov

WIRE/SYNTHETIC ROPE ASSEMBLIES

Steel Wire Rope (For manual win	ch)	
OZGAL.19-80B	3/16" x 80'	Galvanized cable assembly
OZSS.19-80B	3/16" x 80'	Stainless steel cable assembly
OZGAL.25-55B	1/4" x 55'	Galvanized cable assembly
OZSS.25-55B	1/4" x 55'	Stainless steel cable assembly

Above cable assemblies come with swaged ball and swivel hook with latch. Custom cable length available.

3/16" - 80 ft. max. length • 1/4" - 55 ft. max. length

Steel Wire Rope (For manual and power winch)				
OZGAL.19-90	3/16" x 90'	Galvanized cable assembly		
OZSS.19-90	3/16" x 90'	Stainless Steel cable assembly		
OZGAL.25-45	1/4" x 45'	Galvanized cable assembly		
OZSS.25-45	1/4" x 45'	Stainless Steel cable assembly		

All cable assemblies come with a swivel hook with latch. Custom cable length available.

3/16" - 90 ft. max. length • 1/4" - 45 ft. max. length

Synthetic Rope		
OZSR.19-15	3/16" x 15'	Ultrex Synthetic Rope
OZSR.19-50	3/16"x 50'	Ultrex Synthetic Rope
OZSR.19-90	3/16"x 90'	Ultrex Synthetic Rope
OZSR.25-50	1/4" x 50'	Ultrex Synthetic Rope
OZSR.25-75	1/4" x 75'	Ultrex Synthetic Rope
OZSR.31-45	5/16" x 45'	Ultrex Synthetic Rope

All synthetic rope assemblies come with looped ends and pre-installed swivel hook with latch










sales@ozliftingproducts.com



HEADACHE BALL

OZHB10

Keeps your wire rope tensioned even when lowering the hook with no load. Compatible with 3/16" and 1/4" wire rope assemblies. Headache balls sold separately from all davit cranes and wire rope assemblies.

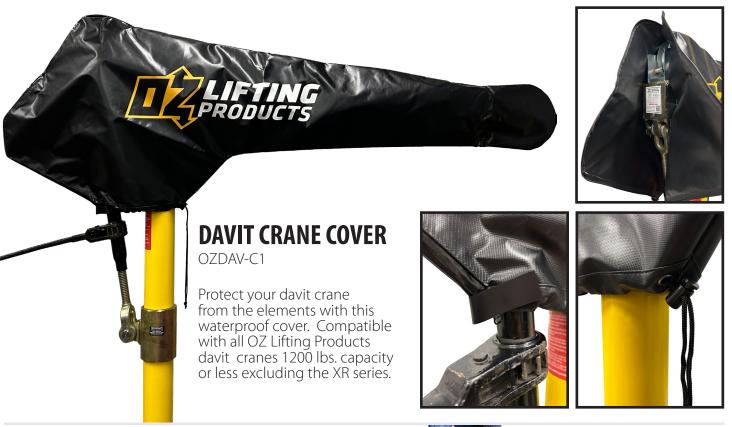

DAVIT CRANE ROLLER BAG OZRB1

Store and transport your davit crane in this davit crane roller bag. Fits OZ Lifting Products davit crane models OZ500DAV, OZ1000DAV, OZ1200DAV, OZCF1200DAV, OZA500DAV, & OZA1000DAV.





