

# CHAIN HOIST




## Features

- All-steel construction
- Long lasting powder coat finish
- Minimal load lifting effort
- Weston-Style brake system with twin pawl design
- Zinc plated load chain & hand chain
- Fully-enclosed gearing
- Load sheave bearings
- Forged alloy steel hooks
- Thrust bearing on lower hook
- Heavy-duty latches
- Individual test certificates & serial numbers



Excludes  
¼ Ton Model

## Standards - CE, ASME/ANSI B30.16 and AS1418.2

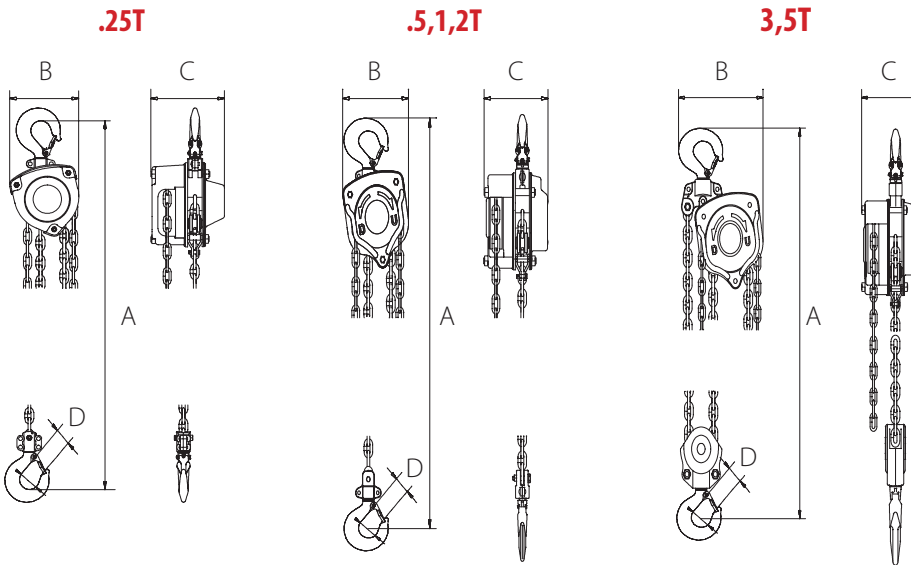

	OZIND025-XXCH	OZIND005-XXCH	OZIND010-XXCH	OZIND020-XXCH	OZIND030-XXCH	OZIND050-XXCH	
Capacity (tons)	0.25	0.5	1	2	3	5	
Effort to Lift S.W.L (lbs)	55	55	66	88	88	88	
Falls of Chain	1	1	1	1	2	2	
Load Chain Diameter (mm)	4x12	5x15	6x18	8x24	8x24	10x30	
Product Dimensions (in)	A	10.2	12.8	14.6	17.5	26.8	
	B	4.18	5.35	5.75	7.32	10.2	
	C	4.02	5.2	5.98	6.14	6.1	7.4
Hook-opening, Upper & Lower	D	1.3	1.38	1.73	2	2.28	2.6
Net Weight (lbs)	4	10	16	19	30	56.2	

**Standard Lift: 5, 10, 15 and 20 ft.**

**.25 T Models Standard Lift: 5 and 10 ft. We also do custom rigging**

Dimensions and illustrations are for reference only and subject to change without notice. XX in hoist model number indicates length of lift by foot.



OZIND020-10CH

