

# LEVER HOIST



## Features


- All-steel construction
- Aluminum construction (¼ Ton Model)
- Long lasting powder coat finish
- Steel handle with rubber grip
- Minimal load lifting effort
- Weston-Style brake system with twin pawl design
- Zinc plated load chain
- Fully-enclosed gearing
- Load sheave bearings
- Forged alloy steel hooks
- Heavy-duty latches
- Carrying bag (¼ Ton Model)
- Individual test certificates & serial numbers



Excludes  
¼ Ton Model

OZIND075-10LH

## Standards - CE, ASME/ANSI B30.21, AS1418.2

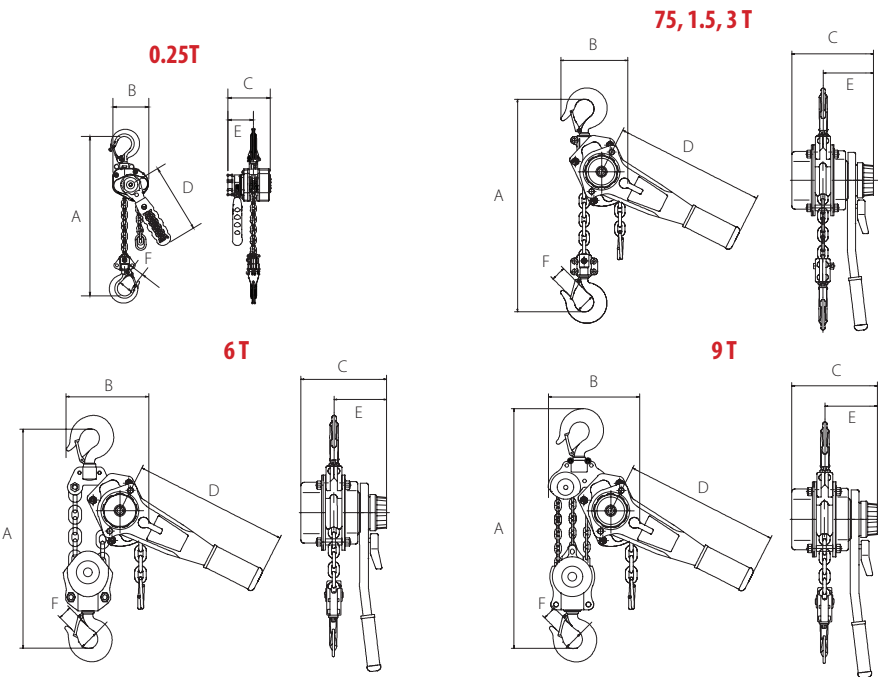

OZIND025-5LH



	OZIND025-XXLH	OZIND075-XXLH	OZIND150-XXLH	OZIND300-XXLH	OZIND600-XXLH	OZIND900-XXLH
Capacity (tons)	0.25	0.75	1.5	3	6	9
Effort to Lift S.W.L. (lbs)	44	31.4	49.5	72	76.5	81
Falls of Chain	1	1	1	1	2	3
Load Chain Diameter (mm)	4x12	6x18	8x24	10x30	10x30	10x30
Product Dimensions (in)	A	9.45	13.38	16.14	20.07	24.41
	B	3.62	5.31	5.91	8.27	9.53
	C	3.86	5.71	6.89	7.68	7.68
	D	6.3	12.2	16.14	16.14	16.14
	E	2.36	3.39	3.94	4.53	4.53
Hook-opening, Upper & Lower	F	0.83	1.18	1.26	1.50	1.89
Net Weight (lbs)	4	12	20	36	55	89

**Standard Lift: 5, 10, 15 and 20 ft.**

**.25 T Models Standard Lift: 5 and 10 ft. We also do custom rigging**

Dimensions and illustrations are for reference only and subject to change without notice.

XX in hoist model number indicates length of lift by foot.

