


# STAINLESS STEEL LEVER HOIST



## Features

- Type 304 Stainless Steel Construction
- Food-Grade Grease That Meets Nsf-H1 Standards
- Free Wheel Feature Allows For Quick Adjustment
- Designed For Lifting or Pulling
- Minimal Load Lifting Effort
- 360-Degree Handle Rotation
- Weston-Style Brake System
- Twin Pawl Design
- Enclosed Gearing
- Sealed Roller Bearing
- Rubber Grip
- Forged Hooks
- Stainless Steel Riveted ID Tags
- Quick Disassembly for Fast & Easy Maintenance

**Standards - CE, ASME/ANSI B30.21, ASME/ANSI B30.16, AS1418.2**

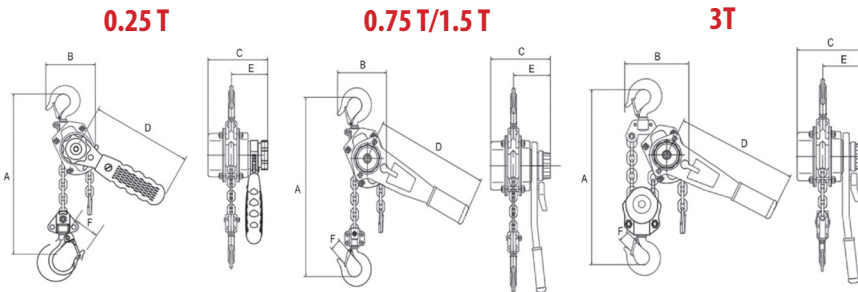

	0ZSS025LH	0ZSS075LH	0ZSS150LH	0ZSS300LH
Capacity - tons	0.25	0.75	1.5	3.0
Headroom - in (mm)	11.22 (284.99)	14.96 (379.98)	16.73 (424.94)	19.76 (501.90)
Effort on Lever to Lift Full Load - lb (kg)	20.20 (9.18)	28.10 (12.77)	41.50 (18.86)	42.70 (19.41)
Falls of Chain	1	1	1	2
Load Chain Diameter - in (mm)	0.16 (4.00)	0.24 (6.00)	0.31 (8.00)	0.31 (8.00)
Dimensional Information - in (mm)				
A	11.22 (284.99)	14.96 (379.98)	16.73 (424.94)	19.76 (501.90)
B	3.86 (98.04)	5.83 (148.08)	5.91 (150.11)	7.68 (195.07)
C	13.94 (100.08)	5.67 (146.30)	6.61 (167.89)	6.61 (167.89)
D	6.10 (154.94)	11.42 (290.07)	16.34 (415.04)	16.34 (415.04)
E	2.40 (60.96)	3.43 (87.12)	3.74 (95.00)	3.74 (95.00)
Hook-opening, upper & lower - in (mm)	F			
	0.92 (23.37)	1.21 (30.73)	1.38 (35.05)	1.52 (38.61)
Net Weight of Head Only - lb (kg)	4.84 (2.20)	12.54 (5.70)	20.35 (9.25)	28.71 (13.05)

**Standard Lift: 10, 15, 20, 30 ft. We also do custom rigging**

Dimensions and illustrations are for reference only and subject to change without notice. XX in hoist model number indicates length of lift by foot.



OZSS075LH

