


## Features


- Fall protection 310 lb.
- Robust all-steel fully-welded construction
- Super-quick adjustment to most I-Beams (see measurements below)
- ROHS compliant zinc plated finish
- Permanent engraved load rating
- Secondary rod lock nut
- Made in USA
- Individual test certificate & serial number

## Standards:

This product meets or exceeds OSHA 1926 Subpart M  
OSHA 1910.140  
ASME Z359.1  
ASME A10.32-2012  
standards for fall protection.

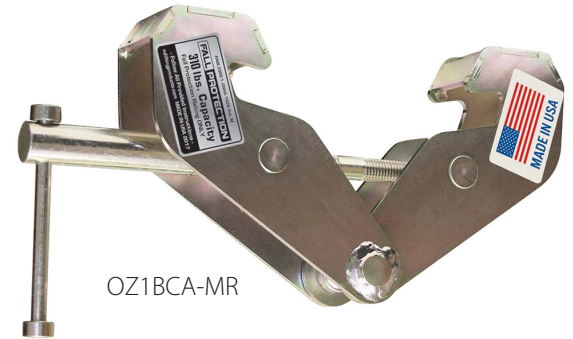

OZ1BCA-MR

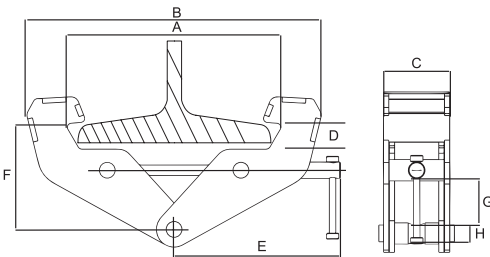


	OZ1BCA-MR	OZ2BCA-MR	OZ3BCA-MR	OZ5BCA-MR	OZ10BCA-MR
Capacity (tons)	1	2	3	5	10
Fall Protection (lb.)	310	310	310	310	310
Dimensional Information (in)	A	3-8	3-8	3.5-13	3.5-13
	B	14.75	14.75	20.5	20.5
	C	2.51	2.91	3.94	4.41
	D	0.9	0.9	1.5	1.5
	E	9.5	9.5	11	11
	F	4.75-5.75	4.75-5.75	7.5-9	7.5-9
	G	1.75	1.75	2.5	2.5
	H	.75	.875	.975	1.125
Net Weight (lb.)	9	11	22	26	39

# PUSH BEAM TROLLEY USA

## Features

- Fall protection 310 lb.
- Fast and easy width adjustments
- Built-in width adjustment indicator
- Universal wheel tread fits most I, S, and W-Beams
- Premium double-sealed ball bearings
- ROHS compliant zinc plated finish
- Anti-drop plates
- Glow in the dark decals
- Ships fully assembled
- Made in USA
- Individual test certificate & serial number

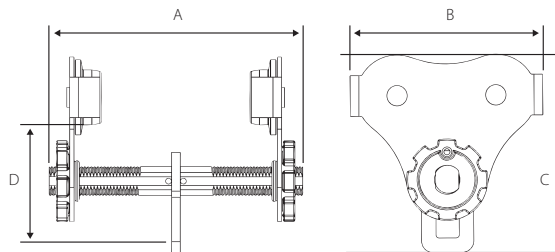

OZ1PBTA-MR  
[PATENTED]

## Standards:

This product meets or exceeds OSHA 1926 Subpart M  
OSHA 1910  
ASME Z359.1-2007  
ASME A10.32-2012  
standards for fall protection.

Dimensions and illustrations are for reference only and subject to change without notice.

**See wheel & bail dimensions on next page**

	OZ05PBTA-MR	OZ05PBTA-MR-12	OZ05PBTA-MR-16	OZ1PBTA-MR	OZ1PBTA-MR-12	OZ1PBTA-MR-16
Capacity (tons)	5	5	5	1	1	1
Adjustable flange width (in)	2.52-8.00	2.52-12.00	2.52-16.00	2.75-8.00	2.75-12.00	2.75-16.00
Max Flange Thickness (in)	1.12	1.12	1.12	1	1	1
Product dimensions	A	12.25	15.5	19.5	15.5	19.5
	B	8.3	8.3	8.3	10.2	10.2
	C	8.5	8.5	8.5	9.8	9.8
	D	5	5	5	5.5	5.5
Minimum radius curve (ft)	2.75	2.75	2.75	3.35	3.35	3.35
Net weight (lb.)	16	19	20	26	30	31



