

INDUSTRIAL CHAIN HOIST




Features

- All-steel construction
- Long lasting powder coat finish
- Minimal load lifting effort
- Weston-Style brake system with twin pawl design
- Zinc plated load chain & hand chain
- Fully-enclosed gearing
- Load sheave bearings
- Forged alloy steel hooks
- Thrust bearing on lower hook
- Heavy-duty latches
- Individual test certificates & serial numbers



Excludes
¼ Ton Model

Standards - CE, ASME/ANSI B30.16 and AS1418.2

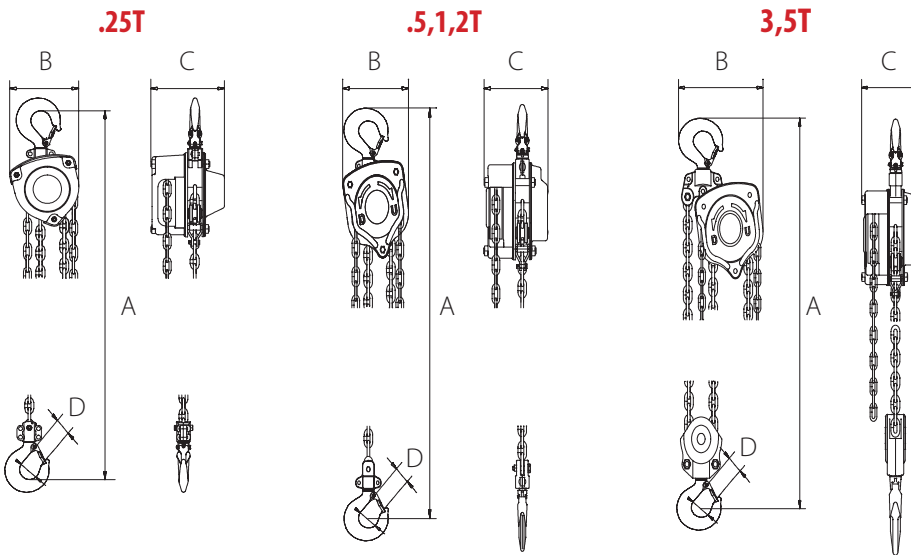

	OZIND025-XXCH	OZIND005-XXCH	OZIND010-XXCH	OZIND020-XXCH	OZIND030-XXCH	OZIND050-XXCH	
Capacity (tons)	0.25	0.5	1	2	3	5	
Effort to Lift S.W.L. (lb.)	55	55	66	88	88	88	
Falls of Chain	1	1	1	1	2	2	
Load Chain Diameter (mm)	4x12	5x15	6x18	8x24	8x24	10x30	
Product Dimensions (in)	A	10.2	12.8	14.6	17.5	26.8	
	B	4.18	5.35	5.75	7.32	10.2	
	C	4.02	5.2	5.98	6.14	6.1	7.4
Hook-opening, Upper & Lower	D	1.3	1.38	1.73	2	2.28	2.6
Net Weight (lb.)	4	10	16	19	30	56.2	

Standard Lift: 10, 15 and 20 ft.

.25 T Models Standard Lift: 5 and 10 ft. We also do custom rigging

Dimensions and illustrations are for reference only and subject to change without notice. XX in hoist model number indicates length of lift by foot.



OZIND020-10CH



WARNING
CANCER AND REPRODUCTIVE HARM
 Some products may contain chemicals known to the state of California to cause cancer, or birth defect or reproductive harm.
www.P65Warning.ca.gov

