

STAINLESS STEEL LEVER HOIST




This reliable solution tackles lifting tasks in demanding environments. Available in capacities ranging from 0.25 to 3 tons, the OZ Lifting Product's Stainless Steel Lever Hoist delivers smooth operation even after extended periods of inactivity exposed to harsh, corrosive conditions. Constructed from Type 304 stainless steel, the hoist boasts exceptional corrosion-resistance, ensuring long-lasting performance. Enclosed gearing protects internal components from dust and debris, while the Weston-style braking system guarantees secure load control and operator safety. This makes this the ideal for wastewater treatment plants, pharmaceutical and food production, oil refineries, and mining operations.

Features

- Type 304 Stainless Steel Construction
- Food-Grade Grease That Meets NSF H1 Standards
- Enclosed Gearing
- Twin Pawl Design
- Sealed Roller Bearing
- Weston-Style Brake System
- Ergonomic Handle with Rubber Grip
- 360-Degree Handle Rotation
- Free Wheel Feature Allows For Quick Adjustment
- Designed For Lifting or Pulling
- Minimal Load Lifting Effort
- Forged Hooks
- Stainless Steel Riveted ID Tags
- Quick Disassembly for Fast & Easy Maintenance

**FREE
SPARE SET
OF LATCHES**

Standards - CE, ASME/ANSI B30.21, ASME/ANSI B30.16, AS1418.2, NSF H1

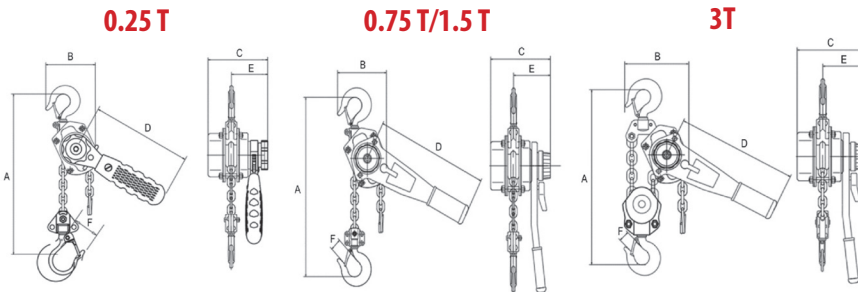

	OZSS025-XXLH	OZSS075-XXLH	OZSS150-XXLH	OZSS300-XXLH
Capacity - tons	0.25	0.75	1.5	3.0
Headroom - in (mm)	11.22 (284.99)	14.96 (379.98)	16.73 (424.94)	19.76 (501.90)
Effort on Lever to Lift Full Load - lb (kg)	20.20 (9.18)	28.10 (12.77)	41.50 (18.86)	42.70 (19.41)
Falls of Chain	1	1	1	2
Load Chain Diameter - in (mm)	0.16 (4.00)	0.24 (6.00)	0.31 (8.00)	0.31 (8.00)
Dimensional Information - in (mm)				
A	11.22 (284.99)	14.96 (379.98)	16.73 (424.94)	19.76 (501.90)
B	3.86 (98.04)	5.83 (148.08)	5.91 (150.11)	7.68 (195.07)
C	3.94 (100.08)	5.67 (146.30)	6.61 (167.89)	6.61 (167.89)
D	6.10 (154.94)	11.42 (290.07)	16.34 (415.04)	16.34 (415.04)
E	2.40 (60.96)	3.43 (87.12)	3.74 (95.00)	3.74 (95.00)
Hook-opening, upper & lower - in (mm)	F			
F	0.92 (23.37)	1.21 (30.73)	1.38 (35.05)	1.52 (38.61)
Net Weight of Head Only - lb (kg)	4.84 (2.20)	12.54 (5.70)	20.35 (9.25)	28.71 (13.05)

OZSS075-XXLH

Standard Lift: 5, 10, 15, 20 ft. We also do custom rigging

Dimensions and illustrations are for reference only and subject to change without notice. XX in hoist model number indicates length of lift by foot.

